


## ECSC ver1.0 (Smart Card Reader)

ECSC smart card readers are designed for securing network access, The reader is suitable for an ExpressCard 34mm slot; Using AU9520 chipset, handling all type of ISO7816 compatible smart cards.

As the rates of identity theft increases, more and more companies are turning to smart technology to secure their networks. E.g. home banking, network security, secure

logon, email encryption, online gaming, infrastructure for logical access and protecting the privacy of on-line bank customers and web shoppers.

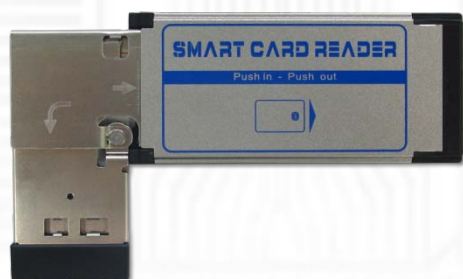

### Function:

- ◆ Compact and lightweight PCMCIA devices for laptop computers
- ◆ USB Microsoft CCID
- ◆ ExpressCard 34 format

▶ SD host adapters

▶ Smart card readers

▶ Generic PC/SC Usb Smart Card Reader

▶ Smart cards

▶ Generic Smart card

▶ Sound, video and game controllers

▼ **Driver download**



As a New manufacturer of quality computer connectivity products since 2009/Mar, BPLUS technology brings to market a broad range of upgrade products. These products bridge the connection between Desktop/Notebook systems and external peripherals.

**Bplus**  
Bplus Technology

Address: 5F, NO. 63, ZHOU-TZYY  
ST., NEI-HU, TAIPEI, TAIWAN, R.O.C  
Tel: 886-2-77210550 Fax: 886-2-87974200  
Email: sales@bplus.com.tw  
Web: http://www.Bplus.com.tw

Functions	Description
Host Interface	Plug and Play ExpressCard/34, USB 1.1
SmartCard Interface	<p>Supports ISO 7816 Class A, B and C cards (5.0 V, 3.0 V)</p> <p>Reads from and writes to all ISO 7816-1,2,3,4 microprocessor cards, T=0 and T=1 protocols, I2C memory card, SLE4418, SLE4428, SLE4432, SLE4442</p> <p>Dedicated hardware block implementation for IC and memory card protocols for highest performance</p>
Chipset Certifications	<p>Based on ISO7816 implementation</p> <p>Support EMV specification</p> <p>Meet Microsoft WHQL USB Smart Card Reader requirements</p> <p>Support PC Smart Card industry standard – PC/SC 1.0</p>
Operating Systems	Windows 98, 98SE, Me, 2000, XP, Server 2003, x64 editions, Vista 32, 64 bits, Seven, Server 2008R2
Environmental	<p>CE, FCC part 15 Class B , ROHS compliant ,</p> <p>Operating: +0°C / +55°C</p> <p>Storage: -20°C / +65°C</p>
Weight and size	30(g) and 85x34x5(LWHmm)

As a New manufacturer of quality computer connectivity products since 2009/Mar, BPLUS technology brings to market a broad range of upgrade products. These products bridge the connection between Desktop/Notebook systems and external peripherals.



Address: 5F, NO. 63, ZHOU-TZYY  
 ST., NEI-HU, TAIPEI, TAIWAN, R.O.C  
 Tel: 886-2-77210550 Fax: 886-2-87974200  
 Email: sales@bplus.com.tw  
 Web: http://www.Bplus.com.tw