


## EC3U (USB3.0 1-port ExpressCard/34 host adapter)

EC3U is Expresscard to USB 3.0 adapter converter. You can easily add USB 3.0 to your notebook with 34/54mm ExpressCard slot.

The SuperSpeed USB 3.0 1-Port ExpressCard/34 easily adds USB 3.0 1-ports host to your notebook computer. Maximize data transfer speeds using higher-bandwidth peripherals including external USB 3.0 external disk drives high-resolution webcams digital video cameras and multi-channel audio.

### Features:

- ◆ Compliant with ExpressCard 1.0 specs.
- ◆ **Interface:** One USB 3.0 port to PCIe 1x I/F
- ◆ **Port:** 1 x 9-pin Type A Female USB 3.0
- ◆ **Transfer rate:** USB 3.0: Up to 5Gb/s; USB 2.0 : Up to 480 Mb/s.
- ◆ **FRESCO** component for the highest level of performance and compatibility.

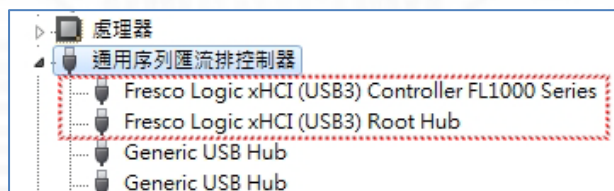

- ◆ Supplying power for USB3.0 connector up to 900mA

**Dimensions:** 34 x 75 x 5mm

**Weight:** 35 g


### Box Contents:

USB 3.0 ExpressCard/34;  
USB 5V Power cable.

### System Requirements:

- ◆ Notebook or desktop PC with an available ExpressCard slot.
- ◆ Windows 7 (32-/64-bit) / Vista (32-/64-bit) / XP (32-/64-bit)(not compatible with Mac)

↓ **Driver download**

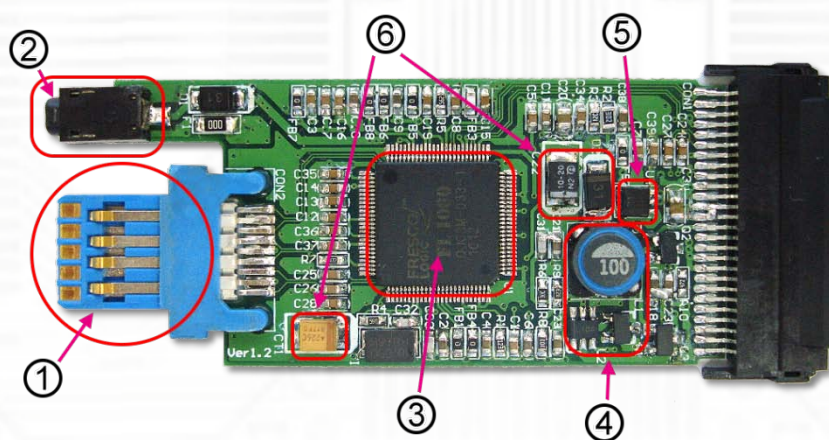

### Special design:

- ① USB3.0 connector invisible while inserted into laptop.
- ② 5V DC-jack build in for external power input.
- ③ **FRESCO** FL1000 controller.
- ④ Internal 5V 900mA DC2DC circuit for USB3.0 current.
- ⑤ CMOS-based LDO regulator for VCC core.
- ⑥ 2x High quality tant. Capacity.



As a New manufacturer of quality computer connectivity products since 2009/Mar, BPLUS technology brings to market a broad range of upgrade products. These products bridge the connection between Desktop/Notebook systems and external peripherals.

**Bplus**  
Bplus Technology

Address: 5F, NO. 63, ZHOU-TZYY  
ST., NEI-HU, TAIPEI, TAIWAN, R.O.C  
Tel: 886-2-77210550 Fax: 886-2-87974200  
Email: sales@bplus.com.tw  
Web: http://www.Bplus.com.tw